

03/29/00
JC685 U.S. PTO

03-30-00

A

SIDLEY & AUSTIN
A PARTNERSHIP INCLUDING PROFESSIONAL CORPORATIONS

CHICAGO
LOS ANGELES
NEW YORK
WASHINGTON, D.C.

717 NORTH HARWOOD
DALLAS, TEXAS 75201
TELEPHONE 214 981 3300
FACSIMILE 214 981 3400

HONG KONG
LONDON
SHANGHAI
SINGAPORE
TOKYO

FOUNDED 1866

WRITER'S DIRECT NUMBER
(214) 981-3328

WRITER'S E-MAIL ADDRESS
pplap@sidley.com

March 29, 2000

Assistant Commissioner
for Patents
Box Patent Application
Washington, DC 20231

Express Mail Mailing Label No.: EL195378756US

Date of Deposit: MARCH 29, 2000

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 C.F.R. § 1.10 on the dated indicated above and is addressed to the Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

DELPHINE NEWELL

Name of Applicant, Assignee, or Registered Representative

Delphine Newell
Signature

MARCH 29, 2000

Date of Signature

JC542 U.S. PTO
09/538339
03/29/00

Re: U.S. Patent Application
INFORMATION DISPLAY DEVICE AND INFORMATION DISPLAY METHOD
By: Katsuyuki NANBA, Isao HAYAMI, Takashi KONDO,
Sadafusa TSUJI, and Hideo HOTOMI
Attorney Docket: 15162/01750

Dear Sir:

Enclosed for filing are the following papers relating to INFORMATION DISPLAY DEVICE AND INFORMATION DISPLAY METHOD, Katsuyuki NANBA, Isao HAYAMI, Takashi KONDO, Sadafusa TSUJI, and Hideo HOTOMI, inventors:

- (1) Specification;
- (2) Executed Declaration and Power of Attorney;
- (3) Formal Drawings (9 sheets);
- (4) Certified Copy of Priority Document;


Assistant Commission for Patents
Box Patent Application
March 29, 2000
Page 2

- (6) Assignment of the invention to Minolta Co., Ltd., with Recordation Form Cover Sheet;
- (7) Check in the amount of \$786.00 to cover the filing fee of the application; and
- (8) Check in the amount of \$40.00 to cover the assignment recordation fee.

In the event the attached checks in the amounts of \$786.00 and \$40.00 are not received with this correspondence, are not sufficient, or in the event additional fees are due, please charge the required fees (other than issue fee) during the pendency of this application to Deposit Account No. 18-1260. Please credit any overpayment to Deposit Account No. 18-1260.

All correspondence is to be directed to the Applicants' attorney at the Dallas address listed above.

Respectfully submitted,



James W. Williams
Registration No. 20,047
Attorney for Applicants

JWW/tjf

Enclosures

INVENTOR INFORMATION

Inventor One Given Name:: Katsuyuki
Family Name:: NANBA
Postal Address Line One:: Minolta Co., Ltd., Osaka Kokusai Bldg.,
Postal Address Line Two:: 3-13, 2-Chome, Azuchi-Machi, Chuo-Ku
City:: Osaka-Shi
State or Province:: Osaka
Country:: JAPAN
Postal or Zip Code:: 541-8556
City of Residence:: Sakai-Shi
State or Province of Residence:: Osaka
Country of Residence:: JAPAN
Citizenship Country:: JAPAN
Inventor Two Given Name:: Isao
Family Name:: HAYAMI
Postal Address Line One:: Minolta Co., Ltd., Osaka Kokusai Bldg.,
Postal Address Line Two:: 3-13, 2-Chome, Azuchi-Machi, Chuo-Ku
City:: Osaka-Shi
State or Province:: Osaka
Country:: JAPAN
Postal or Zip Code:: 541-8556
City of Residence:: Ashiya-Shi
State or Province of Residence:: Hyogo-Ken
Country of Residence:: JAPAN
Citizenship Country:: JAPAN
Inventor Three Given Name:: Takashi
Family Name:: KONDO
Postal Address Line One:: Minolta Co., Ltd., Osaka Kokusai Bldg.,
Postal Address Line Two:: 3-13, 2-Chome, Azuchi-Machi, Chuo-Ku
City:: Osaka-Shi
State or Province:: Osaka
Country:: JAPAN
Postal or Zip Code:: 541-8556
City of Residence:: Sakai-Shi
State or Province of Residence:: Osaka
Country of Residence:: JAPAN
Citizenship Country:: JAPAN
Inventor Four Given Name:: Sadafusa
Family Name:: TSUJI
Postal Address Line One:: Minolta Co., Ltd., Osaka Kokusai Bldg.,
Postal Address Line Two:: 3-13, 2-Chome, Azuchi-Machi, Chuo-Ku
City:: Osaka-Shi
State or Province:: Osaka
Country:: JAPAN
Postal or Zip Code:: 541-8556
City of Residence:: Tondabayashi-Shi
State or Province of Residence:: Osaka
Country of Residence:: JAPAN
Citizenship Country:: JAPAN

005260 " 666660

Inventor Five Given Name:: Hideo
Family Name:: HOTOMI
Postal Address Line One:: Minolta Co., Ltd., Osaka Kokusai Bldg.,
Postal Address Line Two:: 3-13, 2-Chome, Azuchi-Machi, Chuo-Ku
City:: Osaka-Shi
State or Province:: Osaka
Country:: JAPAN
Postal or Zip Code:: 541-8556
City of Residence:: Nishinomiya-Shi
State or Province of Residence:: Hyogo-Ken
Country of Residence:: JAPAN
Citizenship Country:: JAPAN

CORRESPONDENCE INFORMATION

Name Line One:: James W. Williams
Name Line Two:: Sidley & Austin
Address Line One:: 717 N. Harwood
Address Line Two:: Suite 3400
City:: Dallas
State or Province:: Texas
Country:: USA
Postal or Zip Code:: 75201-6507
Telephone One:: 214-981-3328
Fax One:: 214-981-3400
Electronic Mail One:: pplap@sidley.com
Telephone Two:: 214-981-3300
Electronic Mail Two:: jwilli09@sidley.com

APPLICATION INFORMATION

Title Line One:: INFORMATION DISPLAY DEVICE AND INFORMATI
Title Line Two:: ON DISPLAY METHOD
Total Drawing Sheets:: 9
Formal Drawings?: Yes
Application Type:: Utility
Docket Number:: 15162/01750
Secrecy Order in Parent Appl.?: No

REPRESENTATIVE INFORMATION

Registration Number One:: 39095
Registration Number Two:: 27189
Registration Number Three:: 37803
Registration Number Four:: 38425
Registration Number Five:: 29160
Registration Number Six:: 30067
Registration Number Seven:: 44196
Registration Number Eight:: 44234

005250 " 66666666

Attorney Docket No.: 15162/01750

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re

U.S. Application of: Katsuyuki NANBA, Isao HAYAMI, Takashi
KONDO, Sadafusa TSUJI, and Hideo HOTOMI

For: INFORMATION DISPLAY DEVICE AND
INFORMATION DISPLAY METHOD

U.S. Serial No. Not yet assigned

Filed: Concurrently

Group Art Unit: To be determined

Examiner: To be determined

Assistant Commissioner
for Patents
Box Patent Application
Washington, DC 20231

Dear Sir:

Express Mail Mailing Label No.: EL195378756US

Date of Deposit: MARCH 29, 2000

I hereby certify that this paper or fee is being
deposited with the United States Postal Service
"Express Mail Post Office to Addressee" service
under 37 C.F.R. § 1.10 on the dated indicated above
and is addressed to the Assistant Commissioner for
Patents, Box Patent Application, Washington, DC
20231.

DELPHINE NEWELL

Name of Applicant, Assignee, or Registered Representative

Delphine Newell
Signature

MARCH 29, 2000

Date of Signature

TRANSMITTAL OF PrintEFS PATENT APPLICATION BIBLIOGRAPHIC DATA

Submitted herewith is bibliographic data (3 pages) for
the above-identified application, in the PrintEFS Version
1.0.1 program format.

Respectfully submitted,

James W. Williams

James W. Williams
Registration No. 20,047
Attorney for Applicants

JWW/tjf

SIDLEY & AUSTIN
717 N. Harwood
Suite 3400
Dallas, Texas 75201-6507
(214) 981-3328 (direct)
(214) 981-3300 (main)
March 29, 2000

005220" 55555555

INFORMATION DISPLAY DEVICE AND INFORMATION DISPLAY METHOD

This application is based on application No. 11-93008 filed in
5 Japan, of which content is hereby incorporated.

BACKGROUND OF THE INVENTION

1. Field of the Invention

10 The present invention relates to an information display device,
and more particularly to an information display device and an
information display method for displaying information stored in a storage
medium on a display as visible information.

2. Description of Prior Art

15 Recently, an information display device (an electronic book) which
is capable of taking in and ejecting a storage medium, such as a CD-ROM,
an MD or the like, stored with digital information of books and reads out
a desired piece of information from the storage medium to display the
information on a liquid crystal display as visible information is suggested
20 (for example, see Japanese Patent Laid Open Publication No. 9-265470)
and is being developed into various types. Such electronic books are
generally structured to be mobile and driven by a battery.

Meanwhile, various kinds of liquid crystal are used for displays
which display information, and the driving characteristics to drive liquid
25 crystal, such as the driving method, the driving voltage, etc., are different
from kind to kind. It is very effective for energy saving of an electronic

book to use liquid crystal with a memory effect which does not consume electric power in a state to keep displaying information thereon.

However, liquid crystal with a memory effect generally requires a high voltage for reset to get ready for writing thereon. In a structure using a battery, if another member which requires a high voltage is driven simultaneously with reset of the liquid crystal, a voltage drop may occur, which means unstability of operation. Liquid crystal with a memory effect also requires a relatively long time for reset, and therefore, when such liquid crystal is used for an electronic book, it takes a long time for paging. If audio information is reproduced simultaneously with display of information, it takes a longer time for paging. Especially, if it takes a long time to execute a mode to display series of information rapidly, the rapid display mode becomes nonsense.

SUMMARY OF THE INVENTION

An object of the present invention is to provide an information display device and an information display method which are capable of preventing a driving voltage from dropping, which avoids unstability of operation.

Another object of the present invention is to provide an information display device and an information display method which never degrade performance in a rapid display mode.

In order to attain the objects, an information display device according to the present invention comprises: a display section which displays information stored in a storage medium as visual information; a

first driving section which drives the display section to write information thereon; a second driving section which drives the storage medium to read information from the storage medium; a power source section which supplies electric power to the first and second driving sections; and a
5 control section which inhibits the second driving section from driving the storage medium while the first driving section performs a reset operation of the display section.

In the above information display device, during a reset operation of the display section which requires a high voltage, a drive of the storage
10 medium which also requires a high voltage is inhibited, so that the supply of a high voltage to the display section can be guaranteed. Thereby, unstability of operation due to a drop of the driving voltage can be avoided.

Another information display device according to the present
15 invention comprises: a display section which uses liquid crystal with a memory effect and displays information stored in a storage medium; a sound reproducing section which reproduces sound in accordance with the information displayed; a power source section which supplies electric power to the display section and the sound reproducing section; a
20 selecting section which selects a mode to perform writing of information on the display section at a specified speed; and a control section which inhibits the sound reproducing section from reproducing sound when the selecting section selects the mode.

In the above information display device, during execution of the
25 mode to perform writing at a specified a speed (rapid display mode), reproduction of sound which is a relatively heavy load on the power

source section is inhibited. Therefore, writing on the display section is never delayed, thereby avoiding trouble of degrading performance in the rapid display mode.

5

BRIEF DESCRIPTION OF THE DRAWINGS

These and other objects and features of the present invention will be apparent from the following description with reference to the accompanying drawings, in which:

10 Fig. 1 is a front view of an electronic book which is an embodiment of the present invention;

Fig. 2 is a bottom view of the electronic book;

Fig. 3 is a block diagram which shows a control circuit of the electronic book;

15 Fig. 4 is a sectional view of an exemplary liquid crystal display to be employed as a display of the electronic book;

Fig. 5 is a block diagram which shows a driving circuit of the liquid crystal display;

20 Fig. 6 is a graph which shows the relationship between the voltage of a selective signal in the driving circuit and the Y value;

Fig. 7 is a chart which shows an exemplary waveform of a voltage applied for operation in an ordinary display mode;

Fig. 8 is a chart which shows exemplary waveforms of voltages applied for operation in a rapid display mode;

25 Figs. 9 and 10 are flowcharts which show a control procedure performed by the control circuit.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Embodiments of an information display device and an information display method according to the present invention will be described with
5 reference to the accompanying drawings. In the following embodiments, the present invention is mainly applied to an electronic book.

Appearance of Electronic Book

Figs. 1 and 2 show the appearance of an electronic book 1 which is an embodiment of the present invention. The electronic book 1 is
10 foldable on the center shaft 11, and two screens 2 and 3 of liquid crystal displays are provided on right and left. Various kinds of literal and image information can be displayed on the screens 2 and 3 as are written in books and magazines. The liquid crystal displays have a memory effect and are driven by a matrix method, and the structure and the
15 driving method of the liquid crystal displays will be described in detail later.

Information to be displayed on the screens 2 and 3 and audio information to be outputted from a speaker is stored in a storage medium
15 such as an MD, an FD, a CD, a DVD or the like. A slot 10 for insertion of the storage medium is provided on the bottom side of the electronic
20 book 1.

Under the screen 3, a power switch 4, a page forward switch 5 and a fast forward switch 6 are provided. Under the screen 2, a page backward switch 7, a fast backward switch 8 and a speaker 9 are provided.
25 Every time the page forward switch 5 is pressed once, the next two pages are displayed on the screens 2 and 3. While the fast forward switch 6 is

being pressed, the next pages are displayed one after another rapidly in a rapid display mode. When the fast forward switch 6 is released from pressure, the pages on the screens 2 and 3 at that time are displayed in an ordinary display mode. Every time the page backward switch 7 is pressed once, the previous two pages are displayed on the screens 2 and 3. While the fast backward switch 8 is being pressed, the previous pages are displayed backward rapidly in the rapid display mode. When the fast backward switch 8 is released from pressure, the pages on the screens 2 and 3 at that time are displayed in the ordinary display mode.

Control Circuit

Fig. 3 shows a control circuit of the electronic book 1. The main member of this circuit is a CPU 21, and the circuit incorporates an image processing circuit 22, an internal memory 23, an operation section 24 composed of the switches 4 through 8, a storage medium driver 25, an LCD driver 26, a sound reproducing circuit 27 and a power source circuit 28.

The storage medium driver 25 drives the storage medium 15 inserted in the slot 10 so as to read information from the storage medium 15 and to send the information to the CPU 21. The storage medium driver 25 comprises a spindle motor to rotate the storage medium 15, a head driver and a pick-up optical system driver. The image processing circuit 22 processes the information read out by the driver 25 into image data. The image data are stored in the internal memory 23. The LCD driver 26 drives the liquid crystal displays in a matrix driving method. The sound reproducing circuit 27 is to reproduce audio information corresponding to the information displayed on the screens 2 and 3, and

the speaker 9 is incorporated in this circuit 27. The power source circuit 28 incorporates a battery 29 as a power source and a booster circuit, and supplies electric power to the CPU 21, the drivers 25, 26 and the sound reproducing circuit 27.

5 In this embodiment, when the screens 2 and 3 are reset for writing thereon, that is, when the page forward switch 5 or the page backward switch 7 is turned on, the CPU 21 controls the power source circuit 28 not to supply electric power to the storage medium driver 25. When the rapid display mode is commanded, that is, when the fast forward switch 6 or the fast backward switch 8 is turned on, the CPU 21 controls the sound reproducing circuit 27 not to reproduce audio information. Then, when the switch 6 or 8 is turned off, reproduction of audio information is started. A procedure for the control will be described in detail later referring to Figs. 9 and 10.

15 Structure of Liquid Crystal Display

Fig. 4 shows a liquid crystal display 100, which is installed behind each of the screens 2 and 3. This liquid crystal display 100 has, on a light absorber 119, a red display layer 111R which makes a display by switching between a red selective reflection state and a transparent state is provided. On the red display layer 111R, a green display layer 111G which makes a display by switching between a green selective reflection state and a transparent state is provided, and on the layer 111G, a blue display layer 111B which makes a display by switching between a blue selective reflection state and a transparent state is provided.

25 Each of the display layers 111R, 111G and 111B has a resin columnar structure 115 and liquid crystal 116 between transparent

substrates 112 which have transparent electrodes 113 and 114, respectively, thereon. On the transparent electrodes 113 and 114, an alignment controlling layer or an insulating layer may be provided.

The transparent electrodes 113 and 114 of each of the display
 5 layers 111B, 111G and 111R are connected to the LCD driver 26, and specified pulse voltages are applied between the electrodes 113 and 114. In each display layer, in response to the voltage applied, the liquid crystal 116 switches between a transparent state wherein the liquid crystal 116 transmits visible light and a selective reflection state wherein the liquid
 10 crystal 116 selectively reflects visible light of a specified wavelength, thereby switching a display.

The transparent electrodes 113 and 114 of each display layer are in the form of strips arranged in parallel at uniform intervals. The electrode strips 113 face the electrode strips 114, and the extending
 15 direction of the electrode strips 113 and the extending direction of the electrode strips 114 are perpendicular to each other. Electric power is applied between the upper electrode strips and the lower electrode strips. Thereby, a voltage is applied to the liquid crystal 116 in a matrix, so that the liquid crystal makes a display. This is referred to as a matrix drive.
 20 By performing this matrix drive toward the display layers sequentially or simultaneously, the liquid crystal display 100 displays a full-color image.

A liquid crystal display which has cholesteric liquid crystal or chiral nematic liquid crystal between two substrates makes a display by switching the liquid crystal between a planar state and a focal-conic state.
 25 In the planar state, the liquid crystal selectively reflects light of a wavelength $\lambda = P/n$ (P: helical pitch of the cholesteric liquid crystal, n:

average refractive index of the liquid crystal). In the focal-conic state, if the wavelength of light selectively reflected by the cholesteric liquid crystal is in the infrared spectrum, the liquid crystal scatters light, and if the wavelength of light selectively reflected is shorter than the infrared spectrum, the liquid crystal transmits visible light. Therefore, by setting the wavelength of light selectively reflected by the liquid crystal within the visible spectrum and providing a light absorbing layer on the side of the display opposite the observing side indicated by arrow "A", the liquid crystal, in the planar state, makes a display of a color corresponding to the wavelength of light selectively reflected and in the focal-conic state, makes a black display. Also, by setting the wavelength of light selectively reflected by the liquid crystal within the infrared spectrum and providing a light absorbing layer on the side of the display opposite the observing side, the liquid crystal, in the planar state, reflects infrared light and transmits visible light, thereby making a black display, and in the focal-conic state, scatters light, thereby making a white display.

If the threshold voltage to untwist liquid crystal which exhibits a cholesteric phase (first threshold voltage) is V_{th1} , by applying the voltage V_{th1} to the liquid crystal for a sufficient time and thereafter dropping the voltage to less than a second threshold voltage V_{th2} which is lower than the first threshold voltage V_{th1} , the liquid crystal comes to the planar state. By applying a voltage which is higher than V_{th2} and lower than V_{th1} for a sufficient time, the liquid crystal comes to the focal-conic state. Each of the states is maintained even after stoppage of application of the voltage. It has been found that such liquid crystal also comes to a state where these two states are mixed. Accordingly, the liquid crystal can

display intermediate tones, that is, can make a display with different tones.

Thus, liquid crystal which exhibits a cholesteric phase has a memory effect, which means that the liquid crystal can maintain its display state after stoppage of application of a voltage. Therefore, by driving a plurality of pixels of the display by a simple matrix driving method, a display of a desired image or letters becomes possible.

Full-color Display

The liquid crystal display 100 which has color display layers 111R, 111G and 111B makes a red display by setting the liquid crystal 116 of the blue display layer 111B and the green display layer 111G to the focal-conic (transparent) state and setting the liquid crystal 116 of the red display layer to the planar (selective reflection) state. The liquid crystal display 100 makes a yellow display by setting the liquid crystal 116 of the blue display layer 111B to the focal-conic (transparent) state and setting the liquid crystal 116 of the green display layer 111G and the red display layer 111R to the planar (selective reflection) state. By setting the liquid crystal 116 of the respective color display layers to the transparent state or to the selective reflection state appropriately, displays of red, green, blue, white, cyan, magenta, yellow and black are possible. Also, by setting the liquid crystal 116 of the respective color display layers to the intermediate state, displays of intermediate colors are possible. Thus, the liquid crystal display 100 can be used as a full-color display.

Driving Circuit and Driving method of Liquid Crystal Display

In each of the display layers of the liquid crystal display 100, the pixels are structured in a simple matrix. Therefore, as Fig. 5 shows, the

pixels can be expressed by a matrix of $m \times n$, in which m is the number of scan electrodes (R1, R2 ... R m), and n is the number of data electrodes (C1, C2 ... C n). The pixel which is at the intersection of a scan electrode R a and a data electrode C b (a, b : natural numbers, $a \leq m, b \leq n$) is expressed by LCa-b. The scan electrodes and the data electrodes are connected to output terminals of a scan electrode driving IC 31 and to output terminals of a data electrode driving IC 32, respectively, and a scan voltage and data voltages are applied to the respective electrodes from the driving ICs 31 and 32 in accordance with the image data transmitted from the LCD driver 26.

The driving circuit for the liquid crystal display 100 is not limited to such a matrix-structured driver. It is possible to carry out serial transmission of image data from the data electrode driving IC 32 via a line latch memory for each line of the scan electrode driving IC 31. In this case, the scan electrode driving IC 31 does not have to cope with lines, and an IC for serial usage is sufficient. Thus, the cost for the driver can be reduced.

In the liquid crystal display 100, the display state of the liquid crystal is a function of the voltage applied and the pulse width. By resetting the whole liquid crystal to the focal-conic state wherein the liquid crystal shows the lowest Y value (luminous reflectance) and thereafter, applying a pulse voltage with a constant pulse width to the liquid crystal, the display state of the liquid crystal changes as Fig. 6 shows. In the graph of Fig. 6, the y-axis indicates the Y value, and the x-axis indicates the voltage applied. When a pulse voltage V_p is applied, the liquid crystal comes to the planar state wherein the liquid crystal

completion, the storage medium driver 25 is started at step S3, and data are read out from the storage medium 15 at step S4. Letters and images are displayed in accordance with the read data on the screens 2 and 3 at step S5, and simultaneously, sound in accordance with the displayed
5 information is reproduced at step S6.

Next, it is judged at step S7 whether or not the page forward switch 5 or the page backward switch 7 is on. If either the switch 5 or the switch 7 is on, the screens 2 and 3 are reset at step S8, and completion of the reset is waited at step S9. On the completion, the program goes
10 back to step S3.

If neither the switch 5 nor the switch 7 is on ("NO" at step S7), it is judged at step S10 whether or not the fast forward switch 6 or the fast backward switch 8 is on. If neither the switch 6 nor the switch 8 is on, the program goes back to step S7. If either the switch 6 or the switch 8 is
15 on, that is, when the rapid display mode is selected, the screens 2 and 3 are reset at step S11, and completion of the reset is waited at step S12. On the completion, the storage medium driver 25 is started at step S13, and data are read out from the storage medium 15 at step S14. The read data are processed into reduced image data at step S15. At this step,
20 specifically, the image processing circuit 22 omits part of the data to reduce the volume of data for rapid display. Then, at step S16, letters and images are displayed on the screens 2 and 3.

Next at step S17, it is judged whether or not the fast forward switch 6 or the fast backward switch 8 is off. Unless the switch 6 or 8 is
25 turned off, the program goes back to step S11. Accordingly, while the switch 6 or 8 is on, pages are serially displayed on the screens 2 and 3 in

the rapid display mode. When the switch 6 or 8 is turned off, which means that the rapid display mode is cancelled, the ordinary display mode is executed. Specifically, the storage medium driver 25 is started at step S18, data are read out from the storage medium 15 at step S19, and letters and images are displayed on the screens 2 and 3 at step S20. Simultaneously, sound in accordance with the displayed information is reproduced at step S21. Then, the programs goes back to step S7.

In this control procedure, the driver 25 is started after completion of reset of the screens 2 and 3 (see at step S2, S9 and S12). Thereby, a drive of the storage medium is inhibited during the reset operation of the screens 2 and 3, and the voltage supplied from the power source circuit 28 is prevented from dropping. Also, it never happens that reset of the screens 2 and 3 and reproduction of sound are simultaneously performed, and the voltage is prevented from dropping.

Further, reproduction of sound is never performed while the rapid display mode is executed (see steps. 11 through S16), and reproduction of sound is performed after cancellation of the rapid display mode (see step S21). Thus, since reproduction of sound, which is a heavy load on the power source, is inhibited during execution of the rapid display mode, the rapid display mode never be slow. Needless to say, a voltage drop is avoided.

Other Embodiments

The appearance, the structure and the control circuit of the information display device (electronic book) may be of any type. Various structures and various driving methods can be adopted for the liquid crystal displays.

Although the present invention has been described in connection with the preferred embodiments above, it is to be noted that various changes and modifications are possible to those who are skilled in the art. Such changes and modifications are to be understood as being within the
5 scope of the present invention.

WHAT IS CLAIMED IS:

1. An information display device comprising:
 - a display section which displays information stored in a storage
5 medium;
 - a first driving section which drives the display section to write
information thereon;
 - a second driving section which drives the storage medium to read
information from the storage medium;
 - 10 a power source section which supplies electric power to the first
and second driving sections; and
 - a control section which inhibits the second driving section from
driving the storage medium while the first driving section performs a
reset operation of the display section.
- 15 2. The information display device according to claim 1, wherein the
display section uses liquid crystal with a memory effect which is capable
of keeping displaying information thereon in a state of not supplying with
electric power.
- 20 3. The information display device according to claim 2, wherein the
liquid crystal is capable of making a color display.
4. The information display device according to claim 1, wherein the
25 power source section supplies electric power from a battery.

5. A method for displaying information stored in a storage medium on a liquid crystal display with a memory effect, said method comprising the steps of:

reading information from the storage medium and displaying the
5 information on the liquid crystal display;
resetting the liquid crystal display in response to a command of
writing on the liquid crystal display; and
inhibiting the reading of information from the storage medium
during the reset of the liquid crystal display.

10

6. An information display device comprising:

a display section which uses liquid crystal with a memory effect
and displays information stored in a storage medium;

a sound reproducing section which reproduces sound in
15 accordance with information displayed on the display section;

a power source section which supplies electric power to the display
section and the sound reproducing section;

a selecting section which selects a mode to perform writing of
information on the display section at a specified speed; and

20 a control section which inhibits the sound reproducing section
from reproducing sound when the selecting section selects the mode.

7. The information display device according to claim 6, wherein the
liquid crystal is capable of making a color display.

25

8. The information display device according to claim 6, wherein the

control section further permits the sound reproducing section to reproduce sound when the mode is cancelled.

9. A method for displaying information stored in a storage medium
5 on a liquid crystal display with a memory effect, said method comprising the steps of:

reading information from the storage medium and displaying the information on the liquid crystal display;

- 10 reproducing sound in accordance with information displayed on the display section;


receiving a command to write information on the liquid crystal display at a specified speed; and

inhibiting the reproduction of sound in response to the command.


ABSTRACT OF THE DISCLOSURE

An information display device which is structured as an electronic book with liquid crystal displays which display information stored in a storage medium. The information display device further has a first driving section which drives the liquid crystal displays and a second driving section which drives the recording medium, and while the displays are reset, the second driving section is inhibited from driving the storage medium. Also, the information display device has a speaker, and when a mode to display information on the liquid crystal displays at a high speed is selected, the speaker is inhibited from reproducing sound.


F I G . 1

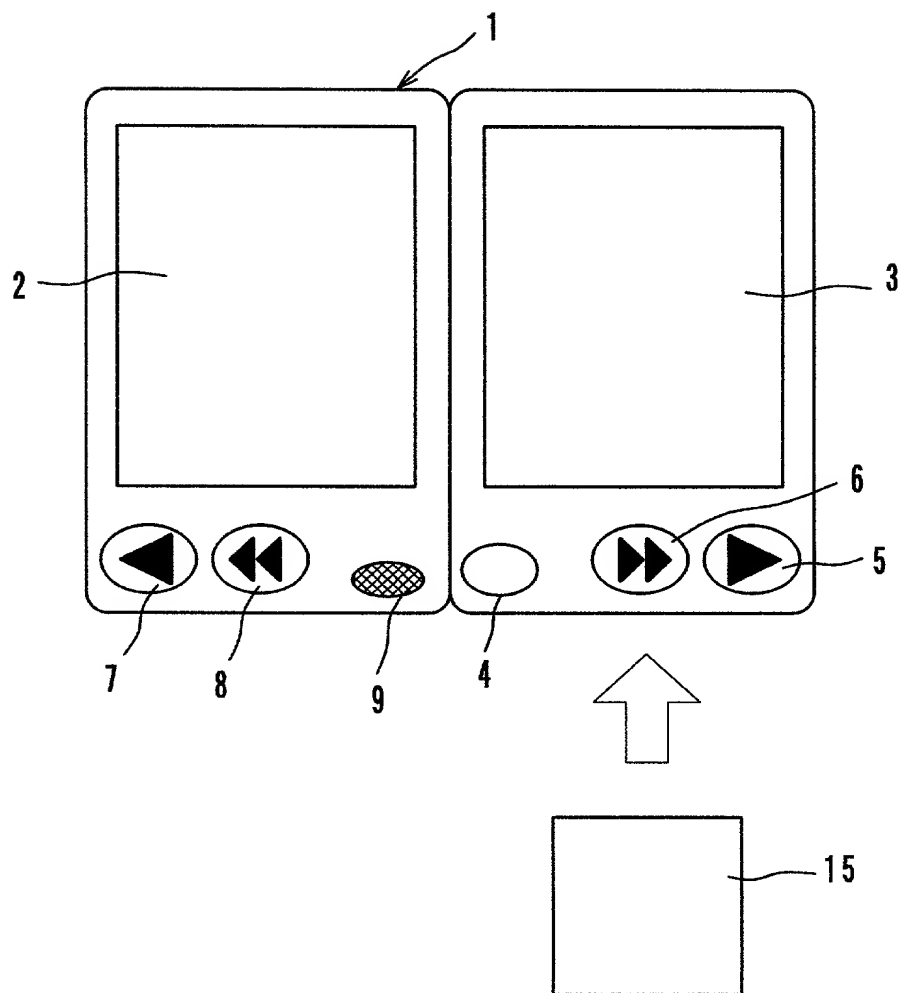


F I G . 2

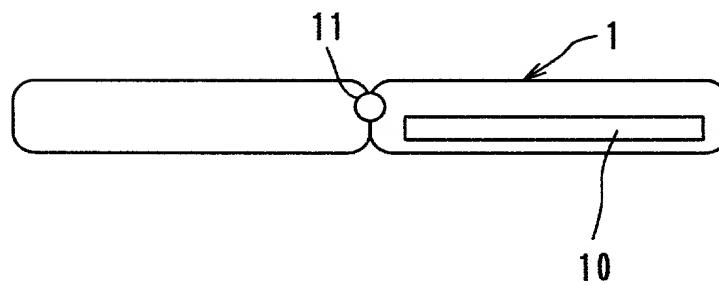


F / G. 3

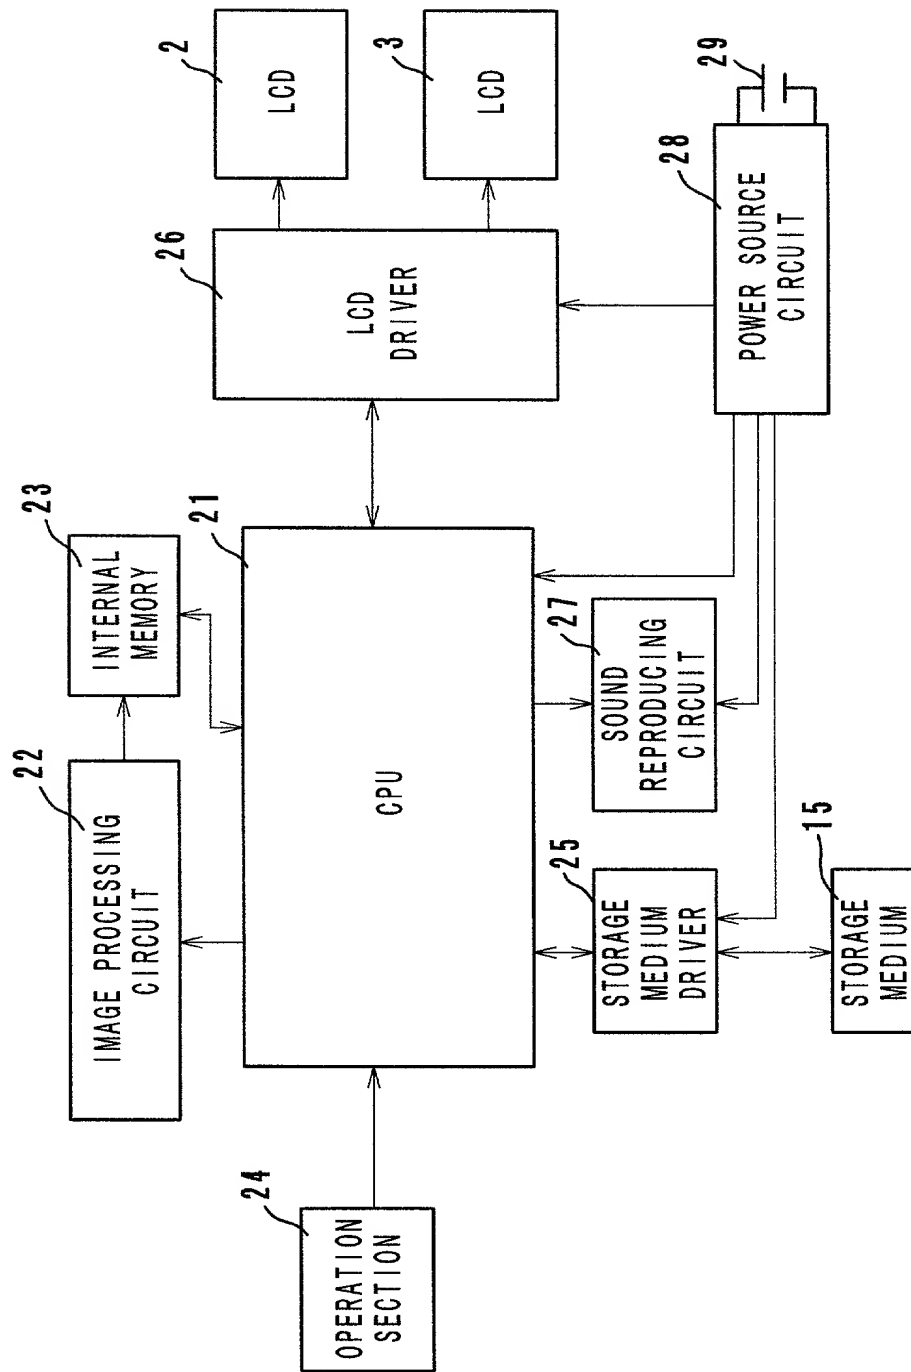


F / G . 5

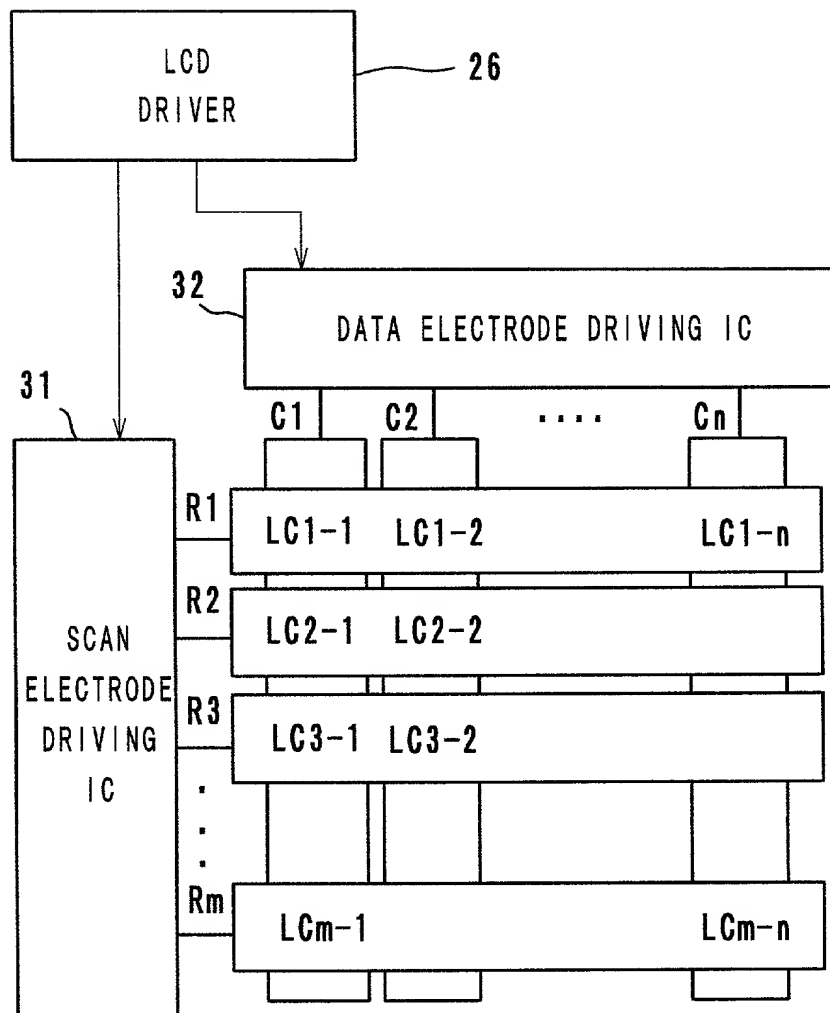

F / G . 6

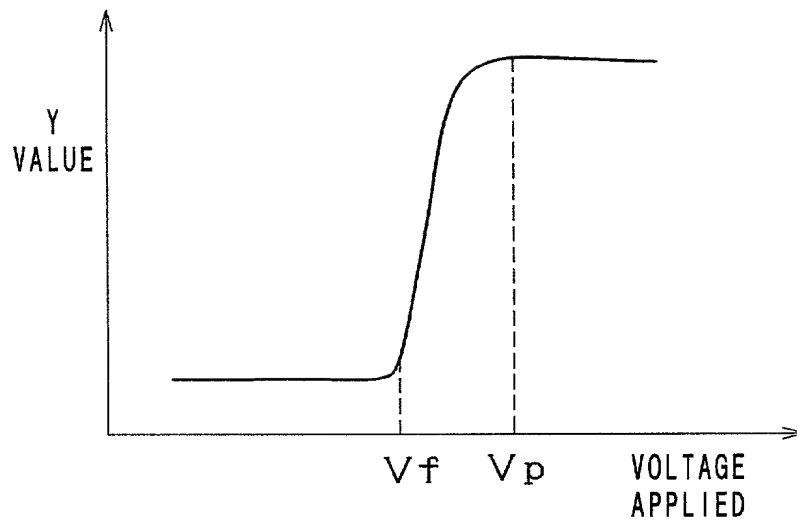


	1970	1971	1972	1973	1974	1975	1976	1977	1978	1979	1980	1981	1982	1983	1984	1985	1986	1987	1988	1989	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100	2101	2102	2103	2104	2105	2106	2107	2108	2109	2110	2111	2112	2113	2114	2115	2116	2117	2118	2119	2120	2121	2122	2123	2124	2125	2126	2127	2128	2129	2130	2131	2132	2133	2134	2135	2136	2137	2138	2139	2140	2141	2142	2143	2144	2145	2146	2147	2148	2149	2150	2151	2152	2153	2154	2155	2156	2157	2158	2159	2160	2161	2162	2163	2164	2165	2166	2167	2168	2169	2170	2171	2172	2173	2174	2175	2176	2177	2178	2179	2180	2181	2182	2183	2184	2185	2186	2187	2188	2189	2190	2191	2192	2193	2194	2195	2196	2197	2198	2199	2200	2201	2202	2203	2204	2205	2206	2207	2208	2209	2210	2211	2212	2213	2214	2215	2216	2217	2218	2219	2220	2221	2222	2223	2224	2225	2226	2227	2228	2229	2230	2231	2232	2233	2234	2235	2236	2237	2238	2239	2240	2241	2242	2243	2244	2245	2246	2247	2248	2249	2250	2251	2252	2253	2254	2255	2256	2257	2258	2259	2260	2261	2262	2263	2264	2265	2266	2267	2268	2269	2270	2271	2272	2273	2274	2275	2276	2277	2278	2279	2280	2281	2282	2283	2284	2285	2286	2287	2288	2289	2290	2291	2292	2293	2294	2295	2296	2297	2298	2299	2300	2301	2302	2303	2304	2305	2306	2307	2308	2309	2310	2311	2312	2313	2314	2315	2316	2317	2318	2319	2320	2321	2322	2323	2324	2325	2326	2327	2328	2329	2330	2331	2332	2333	2334	2335	2336	2337	2338	2339	2340	2341	2342	2343	2344	2345	2346	2347	2348	2349	2350	2351	2352	2353	2354	2355	2356	2357	2358	2359	2360	2361	2362	2363	2364	2365	2366	2367	2368	2369	2370	2371	2372	2373	2374	2375	2376	2377	2378	2379	2380	2381	2382	2383	2384	2385	2386	2387	2388	2389	2390	2391	2392	2393	2394	2395	2396	2397	2398	2399	2400	2401	2402	2403	2404	2405	2406	2407	2408	2409	2410	2411	2412	2413	2414	2415	2416	2417	2418	2419	2420	2421	2422	2
--	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	---

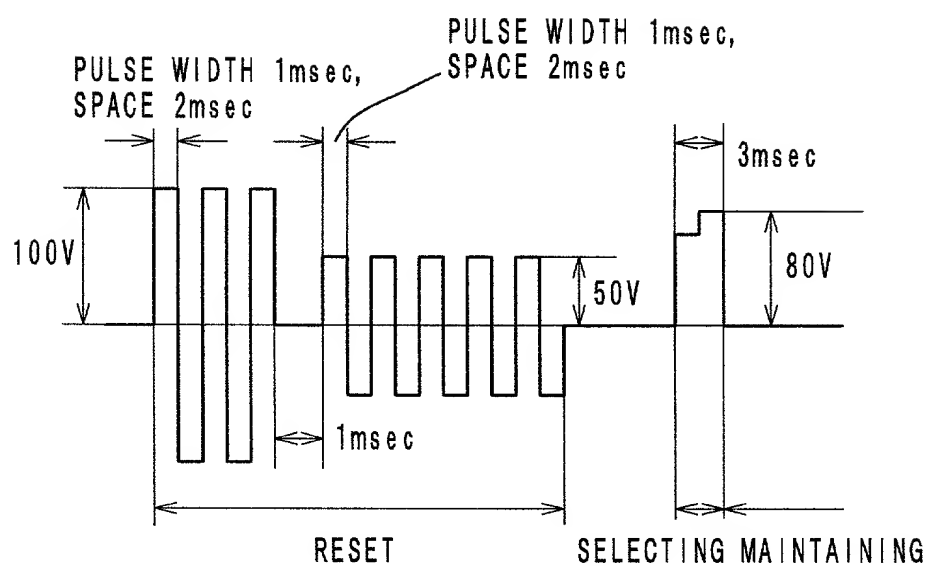

Parameter	Control		100 mg/kg		200 mg/kg		400 mg/kg		800 mg/kg	
	Mean	SD	Mean	SD	Mean	SD	Mean	SD	Mean	SD
Body weight (g)	210.0	10.0	210.0	10.0	210.0	10.0	210.0	10.0	210.0	10.0
Food intake (g)	10.0	2.0	10.0	2.0	10.0	2.0	10.0	2.0	10.0	2.0
Water intake (ml)	5.0	1.0	5.0	1.0	5.0	1.0	5.0	1.0	5.0	1.0
Urine volume (ml)	1.0	0.2	1.0	0.2	1.0	0.2	1.0	0.2	1.0	0.2
Urine pH	7.0	0.5	7.0	0.5	7.0	0.5	7.0	0.5	7.0	0.5
Urine creatinine (mg/dl)	0.5	0.1	0.5	0.1	0.5	0.1	0.5	0.1	0.5	0.1
Urine urea (mg/dl)	1.0	0.2	1.0	0.2	1.0	0.2	1.0	0.2	1.0	0.2
Urine glucose (mg/dl)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Urine protein (mg/dl)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Urine albumin (mg/dl)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Urine electrolytes (mEq/l)	10.0	2.0	10.0	2.0	10.0	2.0	10.0	2.0	10.0	2.0
Urine osmolality (mOsm/kg)	300	50	300	50	300	50	300	50	300	50
Urine specific gravity	1.020	0.010	1.020	0.010	1.020	0.010	1.020	0.010	1.020	0.010
Urine color	Light		Light		Light		Light		Light	
Urine clarity	Clear		Clear		Clear		Clear		Clear	
Urine sediment	None		None		None		None		None	
Urine crystals	None		None		None		None		None	
Urine casts	None		None		None		None		None	
Urine bacteria	None		None		None		None		None	
Urine fungi	None		None		None		None		None	
Urine parasites	None		None		None		None		None	
Urine pH	7.0	0.5	7.0	0.5	7.0	0.5	7.0	0.5	7.0	0.5
Urine creatinine (mg/dl)	0.5	0.1	0.5	0.1	0.5	0.1	0.5	0.1	0.5	0.1
Urine urea (mg/dl)	1.0	0.2	1.0	0.2	1.0	0.2	1.0	0.2	1.0	0.2
Urine glucose (mg/dl)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Urine protein (mg/dl)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Urine albumin (mg/dl)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Urine electrolytes (mEq/l)	10.0	2.0	10.0	2.0	10.0	2.0	10.0	2.0	10.0	2.0
Urine osmolality (mOsm/kg)	300	50	300	50	300	50	300	50	300	50
Urine specific gravity	1.020	0.010	1.020	0.010	1.020	0.010	1.020	0.010	1.020	0.010
Urine color	Light		Light		Light		Light		Light	
Urine clarity	Clear		Clear		Clear		Clear		Clear	
Urine sediment	None		None		None		None		None	
Urine crystals	None		None		None		None		None	
Urine casts	None		None		None		None		None	
Urine bacteria	None		None		None		None		None	
Urine fungi	None		None		None		None		None	
Urine parasites	None		None		None		None		None	


(b)

F / G. 9

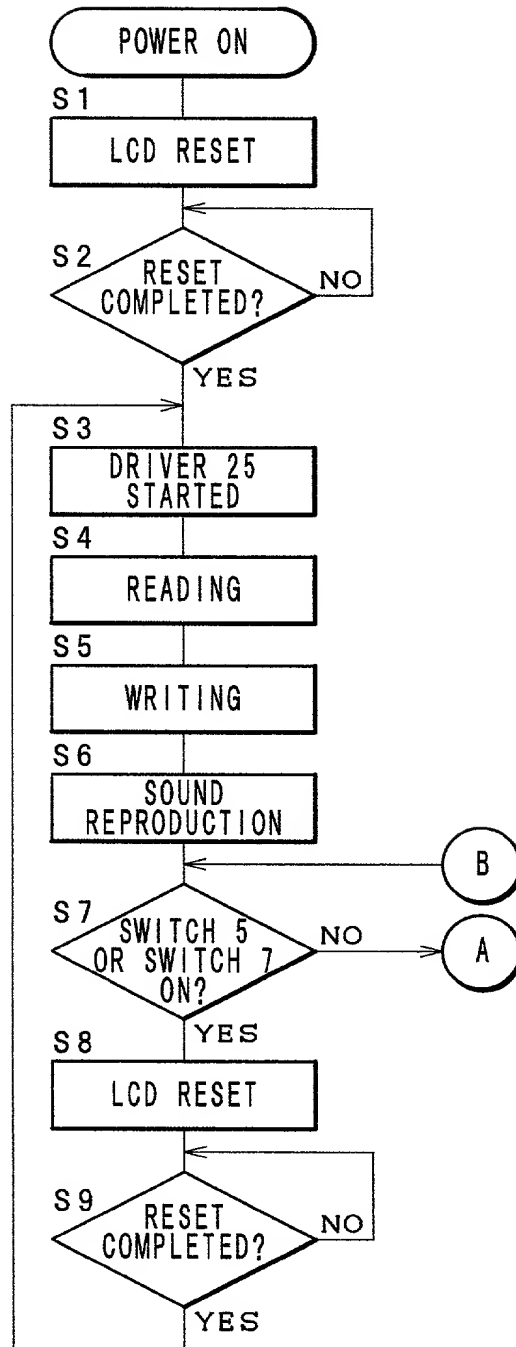

006260" 6636560

F / G. 10

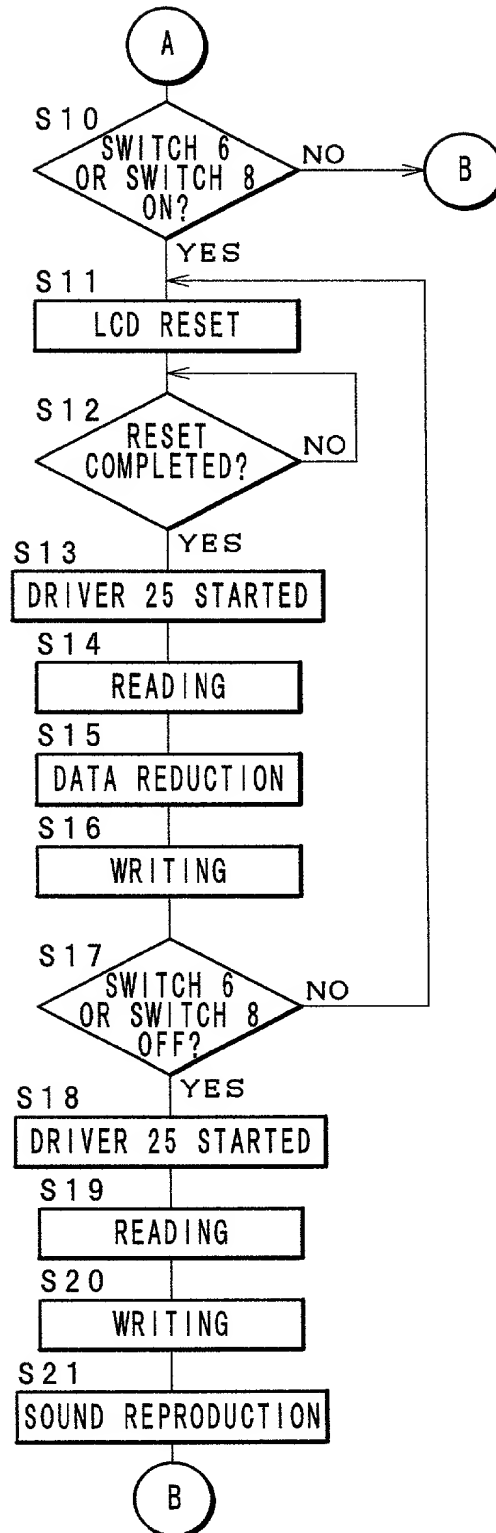

Attorney Docket No. _____

DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship
are as stated next to my name.

I believe I am the original, first and sole inventor
(if only one name is listed below) or I and the other
persons listed below are the original, first and joint
inventors (if plural names are listed below) of the
subject matter which is claimed and for which a patent is
sought on the invention entitled

INFORMATION DISPLAY DEVICE AND INFORMATION DISPLAY METHOD

the specification of which is attached hereto unless the
following box is checked:

☐

was filed on _____
as United States Application Number or
PCT International Application Number
_____ and was amended on
_____ (if applicable).

I hereby state that I have reviewed and understand
the contents of the above identified specification,
including the claims, as amended by any amendment
referred to above.

I acknowledge the duty to disclose information which
is material to patentability as defined in Title 37, Code
of Federal Regulations, Section 1.56.

006220"6EE8E560

I hereby claim foreign priority under Title 35, United States Code, Section 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

PRIOR FOREIGN APPLICATION(S)

Priority
Not Claimed

<u>11-93008 Pat.</u> (Number)	<u>Japan</u> (Country)	<u>31/03/1999</u> (Day/Month/Year Filed)	<input type="checkbox"/>
<u> </u> (Number)	<u> </u> (Country)	<u> </u> (Day/Month/Year Filed)	<input type="checkbox"/>
<u> </u> (Number)	<u> </u> (Country)	<u> </u> (Day/Month/Year Filed)	<input type="checkbox"/>
<u> </u> (Number)	<u> </u> (Country)	<u> </u> (Day/Month/Year Filed)	<input type="checkbox"/>
<u> </u> (Number)	<u> </u> (Country)	<u> </u> (Day/Month/Year Filed)	<input type="checkbox"/>

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

<u> </u> (Application No.)	<u> </u> (Filing Date)
<u> </u> (Application No.)	<u> </u> (Filing Date)

John J. Arnott, Reg. No. 39,095
Charles S. Cotropia, Reg. No. 27,189
Kathi A. Cover, Reg. No. 37,803
Daren C. Davis, Reg. No. 38,425
William R. Gustavson, Reg. No. 29,160
David L. Hitchcock, Reg. No. 30,067
Kelly J. Kubasta, Reg. No. 44,196
William D. McSpadden, Reg. No. 44,234
Gary A. Ray, Reg. No. 40,313
Steven P. Rhines, Reg. No. 38,595
Thomas N. Tarnay, Reg. No. 41,341
James W. Williams, Reg. No. 20,047

Send correspondence to:
SIDLEY & AUSTIN
717 North Harwood
Suite 3400
Dallas, Texas 75201-6507

Direct telephone calls to:
James W. Williams
Direct: (214) 981-3328
Main: (214) 981-3300
Attorney Docket No.:

Full name of sole or first inventor

<u>Katsuyuki</u>	<u>(NMI)</u>	<u>NANBA</u>
First	Middle	Last

Inventor's signature: Katsuyuki NANBA

Date: Mar. 14, 2000

Residence: Sakai-Shi, Osaka, Japan
(city) (prefecture) (country)

Citizenship: Japan

Post Office Address: c/o MINOLTA CO., LTD.,
Osaka Kokusai Building, 3-13, 2-Chome, Azuchi-Machi,
Chuo-Ku, Osaka-Shi, Osaka 541-8556, Japan

Full name of second joint inventor, if any

<u>Isao</u>	<u>(NMI)</u>	<u>HAYAMI</u>
First	Middle	Last

Inventor's signature: Isao Hayami

Date: Mar. 14, 2000

Residence: Ashiya-Shi, Hyogo-Ken, Japan
(city) (prefecture) (country)

Citizenship: Japan

Post Office Address: c/o MINOLTA CO., LTD.,
Osaka Kokusai Building, 3-13, 2-Chome, Azuchi-Machi,
Chuo-Ku, Osaka-Shi, Osaka 541-8556, Japan

Full name of third joint inventor, if any

<u>Takashi</u>	<u>(NMI)</u>	<u>KONDO</u>
First	Middle	Last

Inventor's signature: Takashi Kondo

Date: Mar. 15, 2000

Residence: Sakai-Shi, Osaka, Japan
(city) (prefecture) (country)

Citizenship: Japan

Post Office Address: c/o MINOLTA CO., LTD.,
Osaka Kokusai Building, 3-13, 2-Chome, Azuchi-Machi,
Chuo-Ku, Osaka-Shi, Osaka 541-8556, Japan

Full name of fourth joint inventor, if any

<u>Sadafusa</u>	<u>(NMI)</u>	<u>TSUJI</u>
First	Middle	Last

Inventor's signature: *Sadafusa Tsuji*

Date: Mar. 15, 2000

Residence: Tondabayashi-Shi, Osaka, Japan
(city) (prefecture) (country)

Citizenship: Japan

Post Office Address: c/o MINOLTA CO., LTD.,
Osaka Kokusai Building, 3-13, 2-Chome, Azuchi-Machi,
Chuo-Ku, Osaka-Shi, Osaka 541-8556, Japan

Full name of fifth joint inventor, if any

<u>Hideo</u>	<u>(NMI)</u>	<u>HOTOMI</u>
First	Middle	Last

Inventor's signature: *Hideo Hotomi*

Date: Mar. 15, 2000

Residence: Nishinomiya-Shi, Hyogo-Ken, Japan
(city) (prefecture) (country)

Citizenship: Japan

Post Office Address: c/o MINOLTA CO., LTD.,
Osaka Kokusai Building, 3-13, 2-Chome, Azuchi-Machi,
Chuo-Ku, Osaka-Shi, Osaka 541-8556, Japan